


Two-line Check Weigher HY200DU

Specifications :

Detail Introduction :

The multi-line checkweigher is a product with excellent cost performance developed by our company for target markets such as food, daily chemicals, and electronics. This product has the characteristics of fast detection speed, high measurement accuracy, and strong expansion performance. It provides a more economical solution for checkweighing operations on the production line. It is widely used in food, medicine, and other industries to meet the application requirements of multi-line packaging machines.

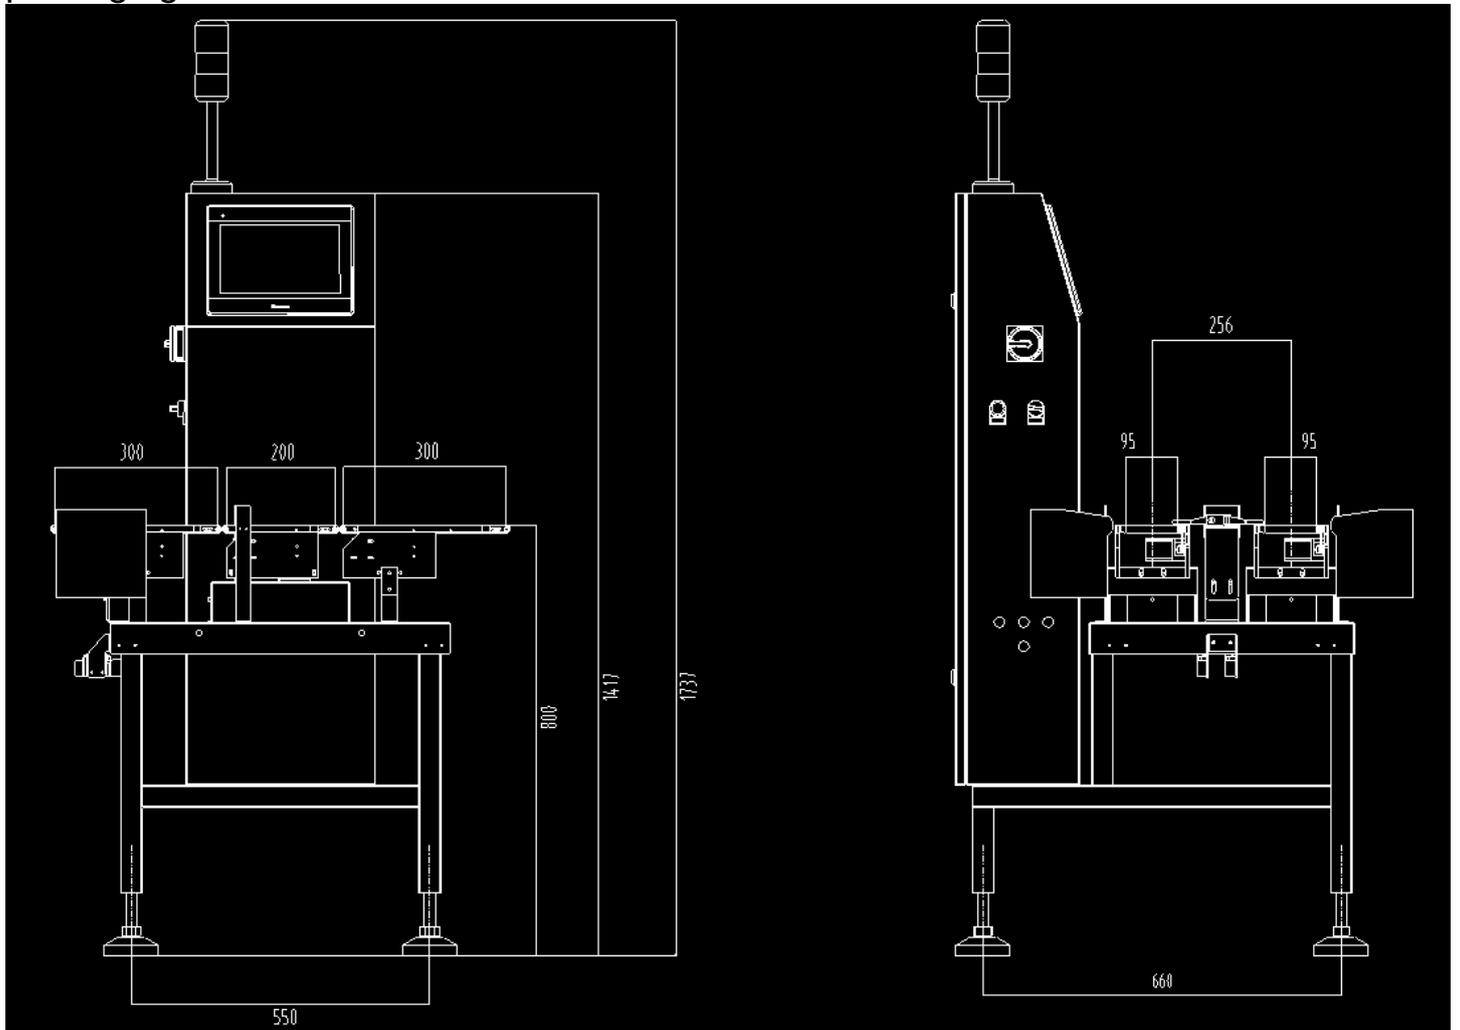

The above pictures are for reference only, the actual delivery size shall prevail.

Main features

1. Strong applicability: the standardized structure of the whole machine and the standardized man-machine interface can complete the weighing of various materials;
2. Easy to replace: It can store a variety of formulas, and it is convenient to replace

the product specifications;

3. Simple operation: using Welun color human-machine interface, fully intelligent and user-friendly design;
4. Easy to maintain: the conveyor belt is easy to disassemble, easy to install and maintain, and easy to clean;
5. Adjustable speed: the frequency conversion control motor is adopted, and the speed can be adjusted according to the needs;
6. High-speed and high-precision: high-precision digital sensors are used, with fast sampling speed and high precision;
7. Zero tracking: it can be reset manually or automatically, as well as dynamic zero tracking;
8. Stable and reliable: The parts are supplied by industrial-grade manufacturers, with stable and reliable work and long service life;
9. Rich functions: the speed of check-weighing is adjustable, 100 groups of product parameters can be stored and called, and there are many practical functions such as data statistics query and password management;
10. External communication: RS485 is used to connect communication equipment such as printers and computers, and the USB interface is used to export data and upgrade software;
11. Wide range of uses: suitable for use in wet, dry and harsh working environments, durable and with the highest reliability.

Technical parameters

Model	HY200W95DU
Maximum range (g)	200 (customizable)
Minimum display (g)	0.02
Minimum display (g) ?*?	±0.3
Throughput* (pieces/min)	Single line 200 (customizable) *2
Weighing belt width (mm)	Single line 95 (customizable)
Weighing belt length (mm)	200
Input\Output length (mm)	300\300
Production line height (mm)	H=800±50mm (customizable)
Conveying direction (facing display)	Right à Left (customizable)
Rejection method	The three parts of input, weighing and rejection are integrated into a whole. Air blow rejection
Basic rack material	Stainless steel
conveying roller material	Anodized aluminum alloy

Conveying table structure material	Anodized aluminum alloy
Conveyor belt material	Wear-resistant PU
control box	Stainless steel wire drawing treatment
Anchor bolts	Height adjustment: ± 50 mm
<p>The structure of each conveyor belt is sturdy and reliable, and the conveyor table can be quickly disassembled.</p> <p>The basic structure of the equipment is solid, and the surrounding vibration will not affect the weighing.</p>	
Wind shield	<p>Transparent acrylic (product height 30 mm, also customizable)</p> <p>Leaves only openings through which the product can pass smoothly</p>
Collecting device	Acrylic Collection Box
<p>Accuracy is closely related to throughput, product weight, size, wind, vibration and smooth conveying.</p>	

Main components

Part Name	Country of origin	Brand
Photoelectric switch/reflector plate	USA	Bonner
On-off quick-off	Germany	Muller Electric
Miniature Circuit Breaker	France	Schneider
Knob Switch / Push Button Switch	France	Schneider
Terminals	Switzerland	ABB
Relay	Switzerland	ABB
Switching power supply	Taiwan	Mean Well
Cylinder/Air Filter	Taiwan	AirTAC
Touchscreen	China	KUNLUNTONGTAI MCGS
Weighing controller	Self-developed	HANYITECH
Electric motor	Self-developed, customizable	HANYITECH
Load cell	Germany	HBM
Flat Belt	Switzerland	Siegling

Display terminal

Color touch screen LCD.

The touch screen can record weighing data, and at least 100 recent records can be observed.

The touch screen has a curve to display historical data, and the latest 50 dynamic data can be observed.

The touch screen can record all the weighing data of the day.

Touch screen language: Chinese, English.

Continuous error alarm: every 5-10 (the number can be set, maximum 255) continuous weighing error, the alarm will be output.

Product accumulation alarm: The photoelectric can set the time for N seconds (the quantity can be set, the maximum is 255 seconds) to judge whether the object passes normally. Manual action is required to clear the alarm. The product accumulation alarm can detect the situation that no product enters the photoelectric for a long time due to motor failure, belt slippage, and abnormal conveying speed.

Continuous error alarm and product accumulation alarm share one alarm output signal.

The parameters of various products can be set and retained (at least 100 recipes), and the operator can directly call them.

Electrical components and hardware with industrial-grade reliability.

Three levels of password protection.

Power failure protection function. Unexpected Power-Down Parameters remain unchanged.

Data statistics function. A total number of products passed / total underweight products / total overweight products passed over a period of time.

Electrical properties

Power requirements: 220VAC, 50Hz

Sound and light alarm: using the two-color alarm, no need to stop the operation of the belt when alarmed.

Sensor: High-precision load cell

Switch: There is a main power switch on the control cabinet, and a start/stop knob

Air source: 0.6pa~0.8pa, air consumption 10 liters

Total power: 800W

Instructions for use

User-level is divided into three levels: operator (operation for browsing and using manual mode), technician (recipe setting, password required), and engineer (equipment debugging, password required).

Simple operation, turn on the power, start and stop the conveyor belt (dynamic weighing), query parameters, etc.