

# Aluminum Bottle Aluminum Cap Beverage Automatic Filling Line (Including carbonated machine)

подробное описание :

Our company gives full play to the advantages of technology, information, equipment and corporate management in water treatment and beverage filling to ensure that the latest international water treatment technology and technology are applied to our equipment and solutions.

The Aluminum Bottle Aluminum Cap Beverage Automatic Filling Line is composed of Water Chiller, Double tank soda water mixer and Isobaric three-in-one filling machine.

## **Water Chiller HY-10P**



Operating voltage: 380V 50HZ  
Cooling power: 12KW  
Production capacity: 500L/H  
Dimensions: 1230\*785\*1310mm  
Machine weight: 200KG  
Including: compressor + condenser + evaporator

## **Double tank soda water mixer HY-WM-01**




Voltage: 380V  
Power: 4.5kw,  
Production capacity: 1-2 tons per hour  
With vacuum deoxidation, heat preservation, plate heat exchanger.

Process of Double tank soda water mixer

- 1.The original gas in the material is separated from the material through a vacuum deoxidation tank to facilitate subsequent mixing of carbon dioxide.
- 2.The equipment cools down the material.
- 3.After the temperature drops to 3-4 degrees, the mixing tube starts to mix carbon dioxide.

- 4.After initial mixing, the material is pumped into the mixing tank through the booster pump for second mixing
- 5.The terminal is equipped with a small heat exchanger to prevent the material from heating up before entering the filling machine.

Isobaric three-in-one filling machine HY8-8-3

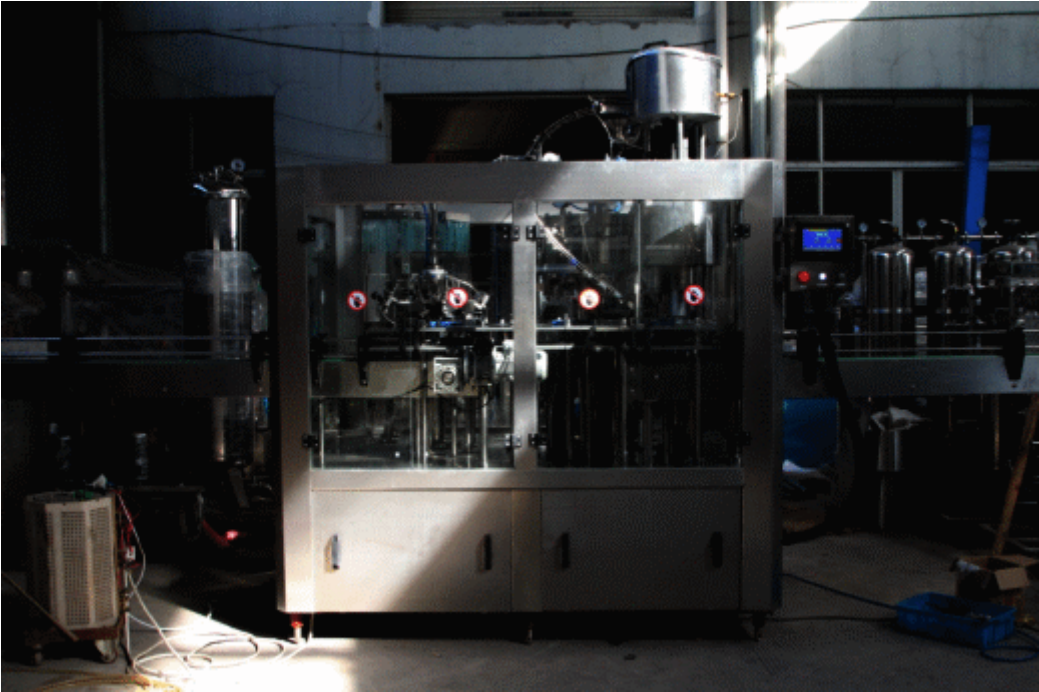

Filling process of gas-containing beverage

Empty bottle    conveying    washing and draining inside and outside upside down    inflation valve (maintain pressure)    filling    capping

Components details and quantity

Washing head: 8pcs

Filling head: 8pcs

Capping head: 3pcs

Flushing pump: 1pcs

Filling pump: 1pcs

Main motor: 1pcs

Specification

Item	Technical parameters
Main engine power	2.2KW
Washing pump power	0.37KW
Filling pump power	0.55KW
Capping device power	0.25KW

Air blower power	0.75KW
Conveying line motor	0.75KW
Working voltage AC	380V 50HZ, 3 phase electricity
Water consumption (sterile water)	About 1 cubic meter/hour (water consumption is adjustable )
Water pressure	0.2-0.4 Pa

Application

This Aluminum Bottle Aluminum Cap Beverage Automatic Filling Line is special for aluminum bottles the Alum-tek, Exal, or Trivium bottles.

