

Dynamic Online Belt Checkweigher C600-6000g series

Especificaciones :


Precio	Contact us
Lugar de origen	China
Cantidad minima para ordenar	1
Términos de pago	L/C, T/T, Paypal
Capacidad de suministro	1000
Detalle de Envio	3days--7days

Introducción detallada :



Technical Parameters

Maximum weighing capacity (g)	600	1200	3000	6000
Highest accuracy (g)	±0.1	±0.2	±0.3	±0.3
Division value (g)	0.05	0.1	0.1	0.1
Maximum throughput (pcs/minute)	200	200	200	150
Belt width (mm)	200/250/300	200/250/300	200/250/300	200/250/300
Weighing belt length (mm)	300/400	300/400	300/400	400
Input and output length (mm)	300/400	300/400	300/400	400
Belt shaft diameter (mm)	25/38	38	38	38
Protection class	IP54	IP54	IP54	IP54
Production line height (mm)	800/850±50 (Customizable)			
Rejection device	Air blow, push rod, baffle, flap (depending on product characteristics)			

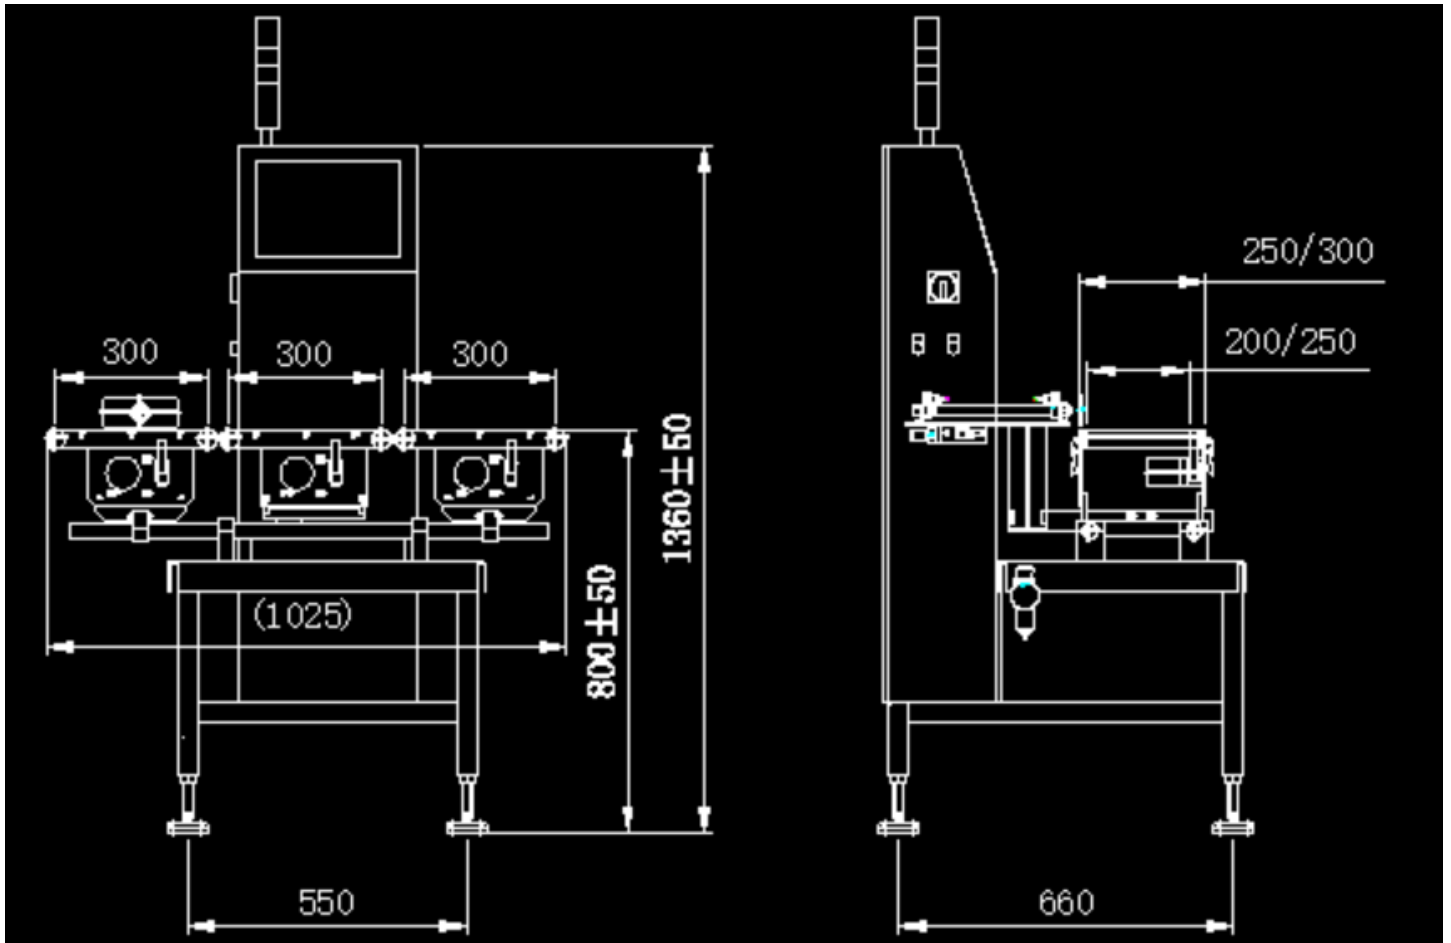

Main features

1. Advanced technology: The C series automatic checkweigher is designed for high-precision dynamic weighing, derived from the advanced imported high-speed sampling technology and dynamic filtering model, and meets the customer's requirements for high-speed and high-precision products.
2. Compact structure: The three-table compact design can be easily integrated into the existing production line to dynamically weigh each product, reject unqualified products or carry out multi-level sorting to ensure product quality is qualified.
3. Wide range of application: C series checkweighing equipment can meet different specifications and characteristics of users. The weighing data can be stored in real time, and the data can be output in real time through the serial port or Ethernet.