

## Dynamic Online Belt Checkweigher C600-6000g series

Spesifikasi:

Harga	Contact us	
Tempat Asal	China	
Min.Jumlah Pemesanan	1	
Syarat Pembayaran	L/C, T/T, Paypal	
Kapasitas Supply	1000	
Detail Pengiriman	3days7days	

## **Detail Pengenalan:**






## **Technical Parameters**

Maximum weighing capacity (g)	600	1200	3000	6000	
Highest accuracy (g)	±0.1	±0.2	±0.3	±0.3	
Division value (g)	0.05	0.1	0.1	0.1	
Maximum throughput (pcs/minute)	200	200	200	150	
Belt width (mm)	200/250/300	200/250/300	200/250/300	200/250/300	
Weighing belt length (mm)	300/400	300/400	300/400	400	
Input and output length (mm)	300/400	300/400	300/400	400	
Belt shaft diameter (mm)	25/38	38	38	38	
Protection class	IP54	IP54	IP54	IP54	
Production line height (mm)	800/850±50 (Custon	800/850±50 (Customizable)			
Rejection device	Air blow, push rod,	Air blow, push rod, baffle, flap (depending on product characteristics)			



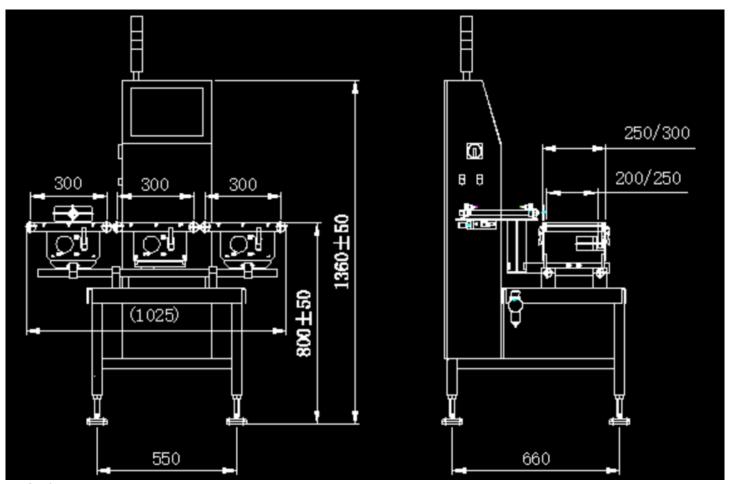

## **Main features**

- 1. Advanced technology: The C series automatic checkweigher is designed for high-precision dynamic weighing, derived from the advanced imported high-speed sampling technology and dynamic filtering model, and meets the customer's requirements for high-speed and high-precision products.
- 2. Compact structure: The three-table compact design can be easily integrated into the existing production line to dynamically weigh each product, reject unqualified products or carry out multi-level sorting to ensure product quality is qualified.
- 3. Wide range of application: C series checkweighing equipment can meet different specifications and characteristics of users. The weighing data can be stored in real time, and the data can be output in real time through the serial port or Ethernet.