

Aluminum Bottle Aluminum Cap Beverage Automatic Filling Line (Including carbonated machine)

Detaylı Tanım :

Our company gives full play to the advantages of technology, information, equipment and corporate management in water treatment and beverage filling to ensure that the latest international water treatment technology and technology are applied to our equipment and solutions.

The Aluminum Bottle Aluminum Cap Beverage Automatic Filling Line is composed of Water Chiller, Double tank soda water mixer and Isobaric three-in-one filling machine.

Water Chiller HY-10P



Operating voltage: 380V 50HZ
Cooling power: 12KW
Production capacity: 500L/H
Dimensions: 1230*785*1310mm
Machine weight: 200KG
Including: compressor + condenser + evaporator

Double tank soda water mixer HY-WM-01




Voltage: 380V
Power: 4.5kw,
Production capacity: 1-2 tons per hour
With vacuum deoxidation, heat preservation, plate heat exchanger.

Process of Double tank soda water mixer

- 1.The original gas in the material is separated from the material through a vacuum deoxidation tank to facilitate subsequent mixing of carbon dioxide.
- 2.The equipment cools down the material.
- 3.After the temperature drops to 3-4 degrees, the mixing tube starts to mix carbon dioxide.

- 4.After initial mixing, the material is pumped into the mixing tank through the booster pump for second mixing
- 5.The terminal is equipped with a small heat exchanger to prevent the material from heating up before entering the filling machine.

Isobaric three-in-one filling machine HY8-8-3

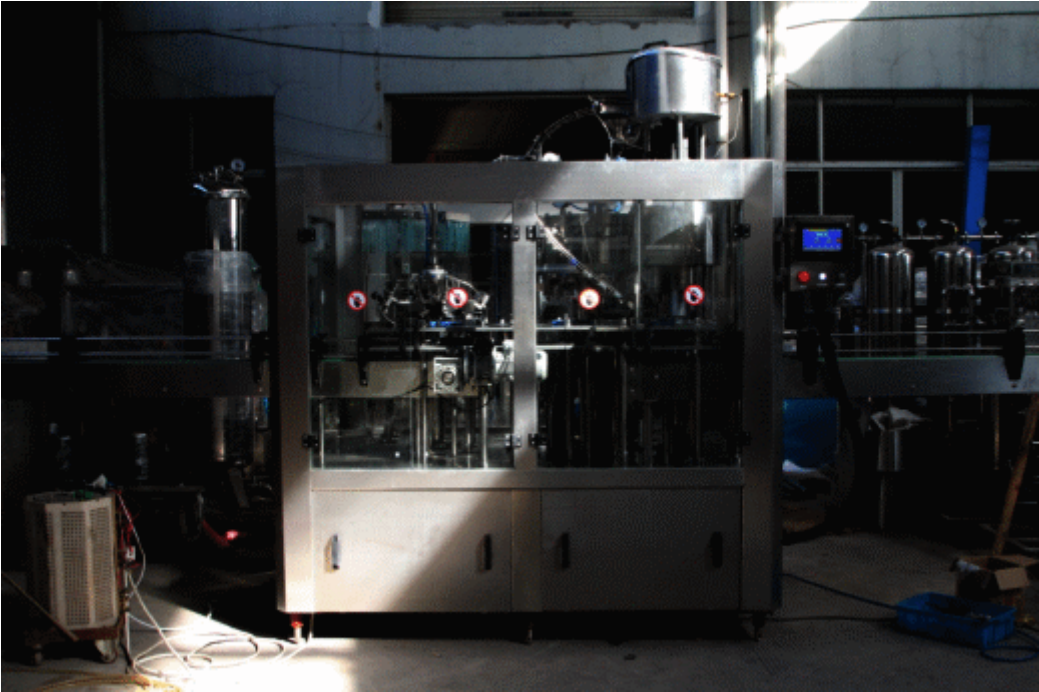

Filling process of gas-containing beverage

Empty bottle conveying washing and draining inside and outside upside down inflation valve (maintain pressure) filling capping

Components details and quantity

Washing head: 8pcs

Filling head: 8pcs

Capping head: 3pcs

Flushing pump: 1pcs

Filling pump: 1pcs

Main motor: 1pcs

Specification

| Item | Technical parameters |
|----------------------|----------------------|
| Main engine power | 2.2KW |
| Washing pump power | 0.37KW |
| Filling pump power | 0.55KW |
| Capping device power | 0.25KW |

| | |
|-----------------------------------|---|
| Air blower power | 0.75KW |
| Conveying line motor | 0.75KW |
| Working voltage AC | 380V 50HZ, 3 phase electricity |
| Water consumption (sterile water) | About 1 cubic meter/hour (water consumption is adjustable) |
| Water pressure | 0.2-0.4 Pa |

Application

This Aluminum Bottle Aluminum Cap Beverage Automatic Filling Line is special for aluminum bottles the Alum-tek, Exal, or Trivium bottles.

