

Dynamic Online Belt Checkweigher C600-6000g series

Özellikler :


Fiyat	Contact us
Üretim Yeri	China
Minimum Sipari? Miktar?	1
Ödeme ?artlar?	L/C, T/T, Paypal
Tedarik Kapsam?	1000
Teslimat Detay?	3days--7days

Detayl? Tan?m :



Technical Parameters

Maximum weighing capacity (g)	600	1200	3000	6000
Highest accuracy (g)	±0.1	±0.2	±0.3	±0.3
Division value (g)	0.05	0.1	0.1	0.1
Maximum throughput (pcs/minute)	200	200	200	150
Belt width (mm)	200/250/300	200/250/300	200/250/300	200/250/300
Weighing belt length (mm)	300/400	300/400	300/400	400
Input and output length (mm)	300/400	300/400	300/400	400
Belt shaft diameter (mm)	25/38	38	38	38
Protection class	IP54	IP54	IP54	IP54
Production line height (mm)	800/850±50 (Customizable)			
Rejection device	Air blow, push rod, baffle, flap (depending on product characteristics)			

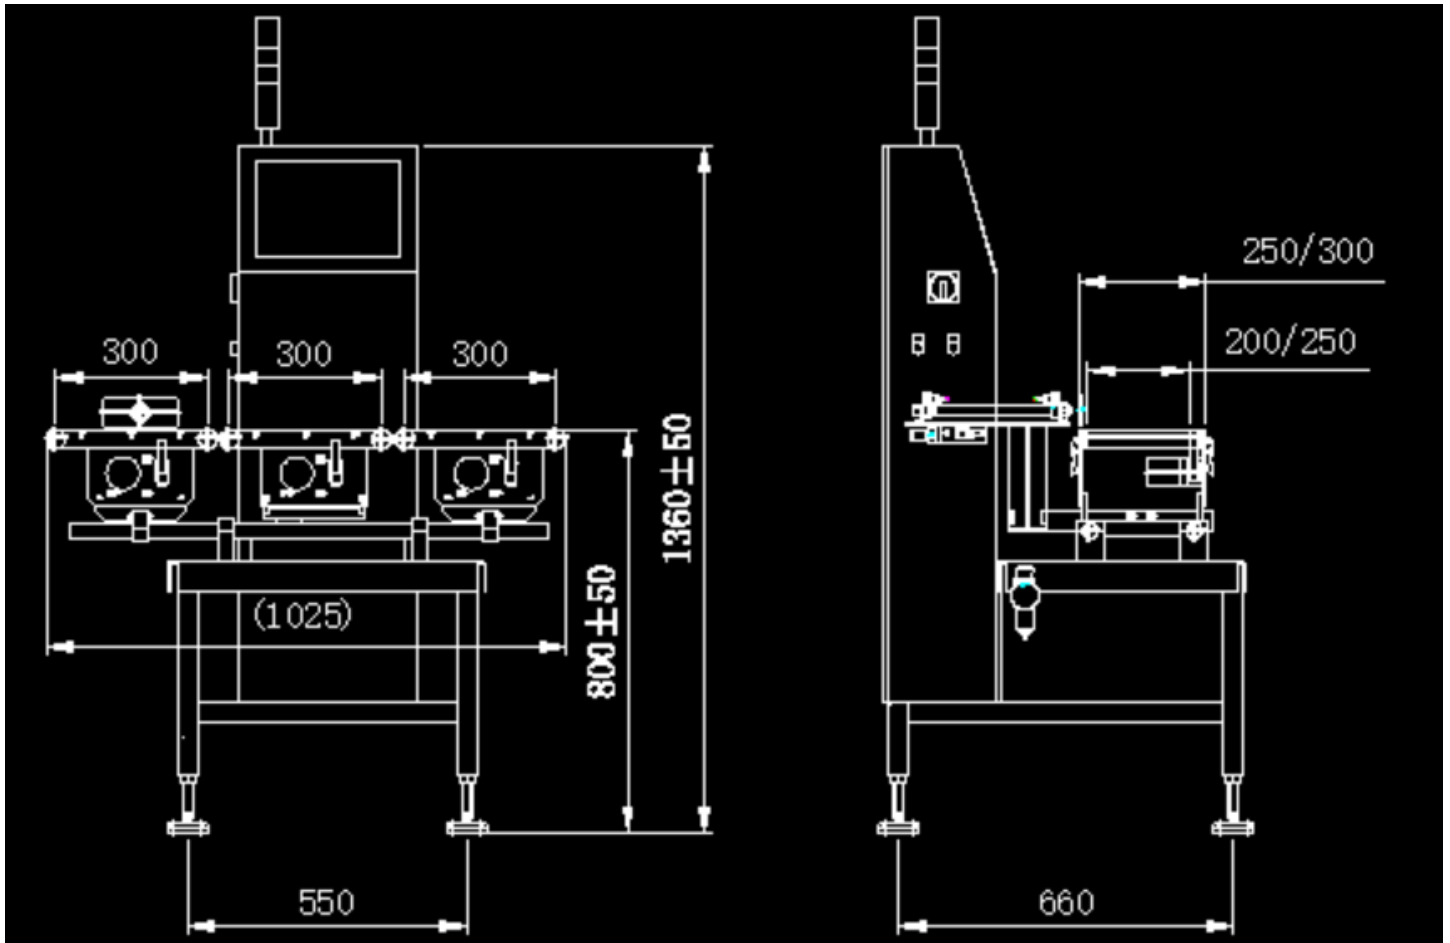

Main features

1. Advanced technology: The C series automatic checkweigher is designed for high-precision dynamic weighing, derived from the advanced imported high-speed sampling technology and dynamic filtering model, and meets the customer's requirements for high-speed and high-precision products.
2. Compact structure: The three-table compact design can be easily integrated into the existing production line to dynamically weigh each product, reject unqualified products or carry out multi-level sorting to ensure product quality is qualified.
3. Wide range of application: C series checkweighing equipment can meet different specifications and characteristics of users. The weighing data can be stored in real time, and the data can be output in real time through the serial port or Ethernet.